



RS-PT14B

UHF Tire Patch Tag (External)

RS-PT14B UHF Tire Patch Tag (External)


This tag developed to track finished tire, with unique identification number to prevent tire theft and cloning, It will last the lifetime of the tire. It should be attached outside the sidewall of the tire with vulcanizing agent, mainly used for bus tire, truck tire, trailer tire, etc.



Specification

Physical Features	
Material	Rubber
Dimensions	85×38×2.5mm
Weight	4.7g
Working Temp	-40~+85℃
Storage Temp	-40~+230℃
RFID Features	
RFID Standard	EPC C1G2 (ISO18000-6C)
Chip Type	Aline Higgs 3/9
Memory	H3: User -512 bits; EPC - 96 bits; TID - 32 bits H9: User -688 bits; EPC - 96 bits; TID - 48 bits
Read Range (Fixed Reader)	0.9m
Other Features	
Data Storage	> 10 years
Re-write	100,000 times
Installation	Stick by vulcanizing agent (the same as tire repair)
Customization	Encoding, Designing, etc.
Package	120pcs/bag
Application	● Tire Factory Control ● Tire Asset Tracking ● Automobile Factory Tire Tracking ● Logistic Vehicle Management, etc.



Dimensions

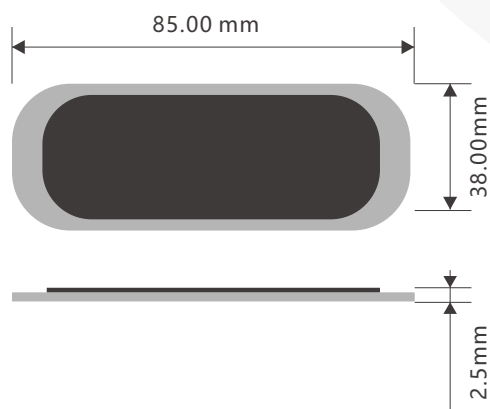

RS-PT14B

UHF Tire Patch Tag (External)

Read Range

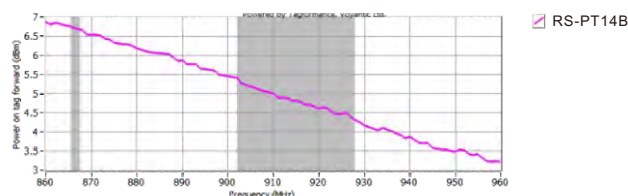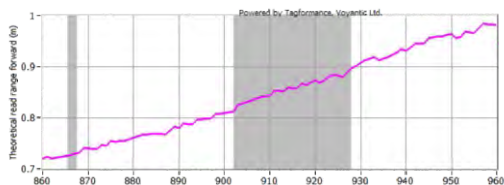

Applications



RuiSing Technology Company (Hong Kong) Limited



www.rstc-hk.com



+86-755-2692 2853



sales@rstc-hk.com

